


HardCurb®



Item Name:

HardCurb®

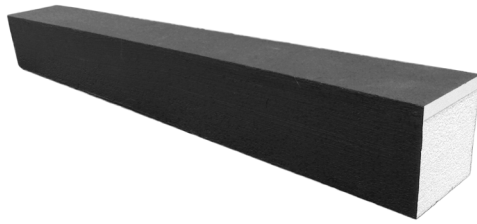

Manufacturer:

KBRS, Inc.
8406 Speedway Blvd.
Hardeeville, SC 29927
(866) 912 - 3211
www.KBRSinc.com

Product Description:

The HardCurb® is a tileable shower curb that is equipped with a self-sealing anchoring cap used to anchor shower enclosure hardware. The HardCurb® is solidly constructed from non-porous composite materials. The HardCurb® prevents the typical leak and rotting problems associated with wood-built shower curbs. The self-sealing anchoring cap is specifically engineered to permanently hold and seal around the anchoring screws required for shower enclosure hardware.

Uses:

- Interior or Exterior
- Commercial and Residential

Suitable Tile Types:

- Vitreous, Semi-vitreous or Non-vitreous Tiles, Quarry, Cement Body Tile
- Impervious Porcelain
- Gauged or Ungauged Natural Stone Tile
- Pebbled Tile
- No Minimum Tile Size

Suitable Substrates:

Any substrate that you would normally build a tile shower on that is level; concrete, approved plywood surface, etc. . Deflection of substrate not to exceed 1/360th of the span 1/2 inch (12 mm) in 15 feet (4.6 m) in accordance with ANSI A108.01-2.3. Allow for live and impact load as well as dead load weight of pan, tile and setting beds.

Composition of Product:

UL® Certified expanded polystyrene (Type XV-EPS 60) geofoam core with a laminated self-sealing anchoring cap.

Benefits of Product in the Installation:

A HardCurb® prevents the leaks and tile failures normally associated with tile shower curbs. It also has a dense, self-sealing anchoring layer that will secure shower enclosure anchoring hardware. The solid construction allows the HardCurb® to be cut in any direction in order to meet required specifications.

HardCurb®



Accessories:

- ShowerSlope™
- Trench-Slope™
- Wedge™

Technical Data (Technical Properties Chart):

The core material of a HardCurb® is UL® Certified expanded polystyrene (Type XV-EPS 60) geofoam. The self-sealing anchoring cap is a laminated combination of dense composite and polyurethane. A HardCurb® is encapsulated in ANSI 118.10 compliant waterproofing membrane

Instructions (Application of Product):

Dry fit the HardCurb® to ensure proper length (cut-to-fit, if required). Using a 3/4" U-notched trowel, apply an ANSI 118.4 compliant thin-set to substrate. Lay HardCurb® in place and firmly embed it into the thin-set to ensure proper bond beneath. Apply approved ShowerSeal® Polyurethane Sealant (or equal) to all gaps and joints. Apply waterproofing as required.

Availability:

KBRS materials are available in both USA and Canada.

For Distribution Information, Call:

Toll Free: (866) 912 - 3211

Telephone: (912) 352 - 0442

Available HardCurb® Sizes:

ITEM CODE	ITEM DESCRIPTION
Custom Sizes	Custom Sizes Available Upon Request
STANDARD SIZES	
RTT-61-HC	4" X 4" X 61" Tileable HardCurb®
RTT-49-HC	4" X 4" X 49" Tileable HardCurb®

Product Warranty:

A HardCurb® comes with a limited 10 year standard product warranty being free from manufacturer's defect only. Additional Warranties are available through a system approach and application.

Health & Safety Precautions:

A HardCurb® is manufactured with chemicals used in the construction industry and care should be exercised when handling. For further safety information visit kbrsinc.com.